

LED-8055 PAR38 / Recessed/ Flood


30w = 100W
LED MH / HPS

SKU No. (USA)	SKU No. Canada
LED-8055E27	LED-8055E27C 30W, 2700K
LED-8055E42	LED-8055E42C 30W, 4200K
LED-8055E57	LED-8055E57C 30W, 5700K

Description:

30W LED retrofit design replaces MH and HPS lamps up to 100w. Design features 24 high power LEDs delivering a uniform 120° light distribution. Suitable for fully enclosed and/or recessed fixtures..

- 30W power consumption
- Replaces up to a 100W HID
- 120° Beam
- 120-277VAC, Non-Dimmable (USA)
- 120-347VAC, Non-Dimmable (Canada)
- Available in 2700K, 4200K & 5700K CCT
- >80 CRI
- 50,000 hr. rated L70 LED life
- Operating temp: -40°F - 122°F
- Double insulated
- UL Listed (US & CA) Damp Locations and rated for enclosed fixtures (pending)
- 5 Year warranty

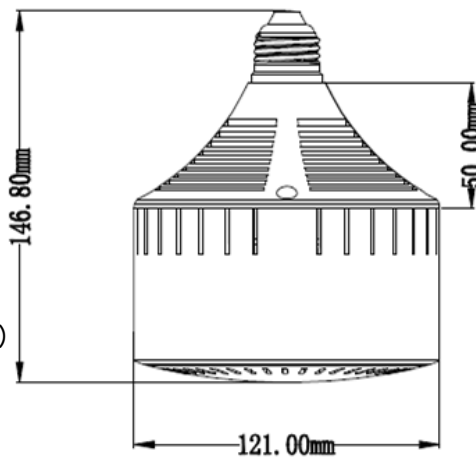

Applications:

LED PAR38 / Recessed / Flood LED for HID retrofit lamps lower energy costs, bulb and ballast replacement costs and also can greatly reduce costly equipment rental when re-lamping HID lamps on and off cycle. LED for HID retrofits will also eliminate lamp disposal issues due to the mercury content of many HID lamps.

- Recessed
- Flood
- Spot

Packaging: 4/Master Carton

Unit : 6.1" x 6.1" x 7.09"

Master: 12.8" x 12.8" x 7.7"

Installation Notes:

- When installing LED-8000 series retrofit lamps within HID fixtures, ballast must be bypassed when present.
- 8000 series retrofits are UL damp rated, sealing the fixtures after installation will deliver best results.
- Installing surge/lightning protectors is highly recommended and helps to eliminate premature driver failure caused by surges and other power fluctuations.

Technical Specifications

Bulb Type	HID Retrofit	Mounting	E26
Bulb Material	Aluminum/ Polycarbonate	LEDs:	24 SMD LED's
Power Consumption	30 watts	Beam Angle	120°
Lumens	2700K: 2100 Lm 4200K: 2300 Lm 5700K: 2400 Lm	Dimmable	No
Efficacy	70-80 LPW	Replaces	Up to 100W HID
Rated LED Life	Up to 50,000 Hrs.	CCT	2700K 4200K 5700K
Power Factor:	>99	CRI:	> 80
IR / UV	None	Mercury/ Lead Content	None
Warranty	5 year Limited	Dimensions	5.75" X 4.75"

Note: All specification information falls within a $\pm 2\%$ range and is subject to change without notice.

NOTE: Light Efficient Design is providing this information to the general public. Please note that all products contained herein are trademarked, copyrighted, and/or have patents pending. Any use of these designs is strictly prohibited without prior written consent. Light Efficient Design protects its proprietary information vigorously in the courts of the United States of America.